


# PRO-BUF-1

## Professional NMEA 0183 Intelligent Buffer

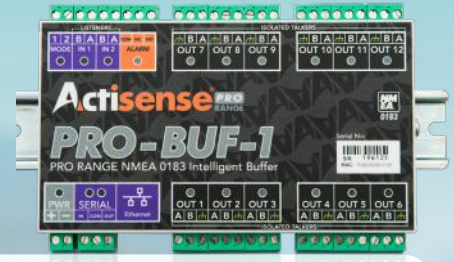

### Feature

### Advantage

### Benefit

- 2 Opto-isolated NMEA 0183 inputs
- 12 ISO-Drive NMEA 0183 outputs
- Bi-directional isolated serial port (optional NMEA 0183 input/output)
- Ethernet Port

- ✓ Two Listener inputs offer buffering, autoswitching or combining options
- ✓ Distributes data to each Listener on-board a large vessel. Each ISO-Drive output protects against ground loops
- ✓ High (115200) baud rate supported. Standard RS232 serial port compatible
- ✓ Ethernet data link for easy configuration of the PRO-BUF

- ✓ Flexible configuration options to buffer autoswitch or combine NMEA data
- ✓ ISO-Drive separates the Listener from the Talker to protect both the PRO-BUF and each connected device. Peace of mind and highest reliability
- ✓ Fast bi-directional data connection to a monitor and control software application
- ✓ PRO-BUF can be configured using any web browser on any Operating system

- Automatic baud rate detection on NMEA 0183 inputs
- Flexible operating modes
- Alarm output options
- Advanced statistics on web browser

- ✓ Changes a Listener input's baud rate to match a connected NMEA Talker's output
- ✓ Both factory default and user defined operating modes can be selected to buffer, autoswitch or combine data
- ✓ Relay output and NMEA sentence output can be configured to trigger under various alarm conditions
- ✓ Web diagnostics show the current data statistics for each input and output

- ✓ Allows the PRO-BUF to work out-of-the-box without baud rate configuration
- ✓ Allows PRO-BUF to work out-of-the-box without configuration for basic installations, or can be easily user configured as required
- ✓ Relay output is compatible with on-board alarm systems and NMEA Alarm sentence can be displayed and actioned on an MFD
- ✓ Allows a user to quickly understand if an input or output is behaving as it should

- Input and output diagnostic LEDs
- Alarm and Mode LEDs

- ✓ Quick indication of input / output data presence to help diagnose issues
- ✓ Highly visible Alarm and Mode indicators show current device state

- ✓ Individual diagnostic LED provides confidence that each input / output is passing data
- ✓ Two LEDs to help the user understand the current PRO-BUF operating state

- Designed for 12 / 24 Volt supply
- Isolation from battery ground

- ✓ Can be powered from any standard DC power supply found on vessels
- ✓ Each output has 1500 volts of isolation from the DC power supply ground

- ✓ Allows use on large vessel 24V DC power supplies systems
- ✓ Critical to keeping connected devices protected from ground loop damage


- 2-part pluggable connector system
- DIN rail or Panel mountable

- ✓ Quick installation of cables and reconnection between inputs / outputs
- ✓ DIN rail mountable and supplied with a small section of DIN rail for a quick install

- ✓ Fast installations and supports both screw and screwless terminal types. Ideal for quick diagnostic swapping
- ✓ Fast installation / reinstallation on both large and small vessels

# PRO-BUF-1

## Professional NMEA 0183 Intelligent Buffer

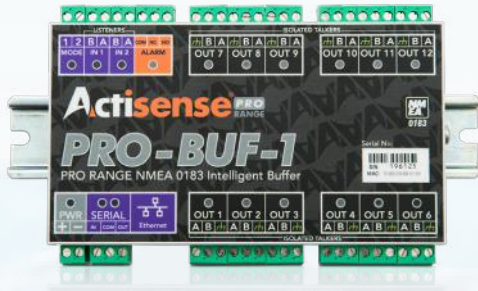

Adaptable NMEA 0183 Buffer with a variety of operating modes. Provides two OPTO-isolated inputs and twelve ISO-Drive™ outputs, keeping devices safe from hazardous ground loops.

PRO-BUF-1 is reliable, robust and provides isolation on all inputs and outputs as standard. With two NMEA 0183 inputs, twelve NMEA 0183 outputs, a bi-directional serial port and an Ethernet port, the PRO-BUF-1 is a perfect solution for larger leisure vessels and commercial shipping.

The PRO-BUF-1 is designed to suit the majority of NMEA 0183 systems and ready to go 'out of the box' by simply hard-wiring the two mode inputs as required. The manually configurable basic modes of operation include variations of buffer modes, autoswitch modes, and combine modes.

Mechanical	
Housing material	Polycarbonate / ABS blend
Flame retardancy	UL94 - V0
Dimensions (mm)	BAS-S: 160 x 32 x 107, BAS-R: 160x 32 x 122
Weight	250g
Mounting	DIN rail mount (35mm top hat rail EN 50 022)
Compass safe distance	TBD
Wiring terminals	Pluggable 2/3 way screw or screwless connectors, 5mm pitch, 12 to 30 AWG
Approvals and Certifications	
EMC	IEC 60945 (sections 9 & 10)
CE	2004/108/EC
Type approval	DNV planned
Environmental protection	IP44
Operating temperature	-20°C to +70°C
Storage temperature	-40°C to +85°C
Relative Humidity (RH)	0 - 80% RH
Guarantee	3 years, extending to 5 years when product registered

Part Numbers: PRO-BUF-1-BAS-R  
PRO-BUF-1-BAS-S

Power Supply	
Input supply voltage	10 to 35 V DC
Input supply current	325mA max @ 12V DC (all outputs @ full drive into 100 ohm loads)
Input protection	Continuous reverse polarity, transient overvoltage and ESD protection
Power indicator	LED, Blue - indicates unit is functioning correctly
NMEA 0183 Port - Listener & Talker	
Number of Listener / input ports	2 isolated NMEA 0183 Listeners
Number of Talker / output ports	12 isolated NMEA 0183 Talkers
Compatibility	Fully NMEA 0183, RS422 & RS232 compatible. RS485 Listener compatible
Electrical isolation	2500 V input to ground, 1500 V output to ground using ISO-Drive™
Speed / baud rate	4800 to 38400 bps
Talker output voltage drive	>= 2.1V (differential) into 100 ohm
Talker output current drive	20 mA maximum per output
Talker output protection	Short circuit and ESD
Listener input voltage tolerance	-15 V to +15 V continuous, -35 V to +35 V short term (< 1 second)
Listener input protection	Current limited, overdrive protection to 40 VDC and ESD protection
Listener data indicator	LED, Green (Flashes to indicate valid input)
Talker data indicator	LED, Orange (Flashes at data rate)
Serial Port	
Number of input ports	1 isolated input
Number of output ports	1 isolated output
Compatibility	RS422 & RS232 compatible. RS485 Listener compatible
Electrical isolation	2500 V input to ground 1500 V output to ground using ISO-Drive™
Speed / baud rate	4800 to 115200 bps
Output voltage drive	>= 2.1V (differential) into 100 ohm
Output current drive	20 mA max.
Output protection	Short circuit and ESD
Input voltage tolerance	-15 V to +15 V continuous, -35 V to +35 V short term (< 1 second)
Input protection	Current limited, overdrive protection to 40 VDC and ESD protection
Ethernet Port	
Host interface	10/100BaseT, automatic polarity detection
Supported protocols	TCP/IP for configuration and firmware updating TCP/IP and UDP for NMEA 0183 comms
Connector	RJ45
Electrical isolation	2kV
Indicators	Green - Link, Yellow - 100 Mbps
Mode Inputs	
Input voltage range	0 to 35V DC
Protection	Transient overvoltage and ESD protection
Alarm Output	
Contacts	Normally open and normally closed
Electrical isolation	1000V between power supply and contacts
Alarm indicator	LED, red indicates a valid alarm condition